


Voice Cabling Products

CW1308 Internal Phone Cable

CW1308 telephone cables are suitable for the internal connection of telephone systems and other communications equipment.

The cables are insulated and sheathed in LSOH, making them an extremely cost effective general signal cable for fixed installation. The standard sheath colour is white, although various sizes are available in black or grey. Certain pairs of CW1308 cable include a 1.38 mm earth core.

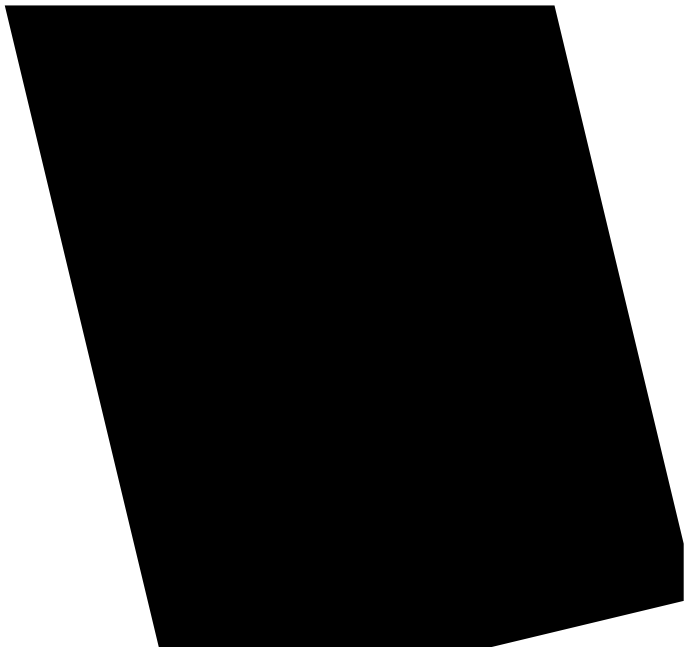

Features & Benefits

- Conforms to BT Specification
- Available in 3 colours
- Available with 3, 4, 10, 20, 25, 50, 100, 200 & 320 pairs

Ordering Information	
Product Description	Part Number
CW1308 3 Pair Phone Cable	001-008-006-03
CW1308 4 Pair Phone Cable	001-008-006-04
CW1308 10 Pair Phone Cable + Earth	001-008-005-10E
CW1308 20 Pair Phone Cable + Earth	001-008-005-20E
CW1308 25 Pair Phone Cable	001-008-005-25
CW1308 50 Pair Phone Cable + Earth	001-008-005-50E
CW1308 100 Pair Phone Cable + Earth	001-008-005-100E
CW1308 200 Pair Phone Cable + Earth	001-008-005-200E
CW1308 320 Pair Phone Cable + Earth	001-008-005-320E

Product Specifications	
Conductor Diameter	0.5 mm
Earth Core Diameter	1.38 mm
Max. Conductor Resistance	97.8 ohm/km
Max. Capacitance - Unbalanced	500pF/Km
Working Temperature	0°C to + 70°C
Min. Bend Radius - Fixed	8 x Cable diameter
Colour Code	BT standards
Construction	Tinned solid copper conductor colour coded PVC insulation twisted in pairs, rip cord LSOH sheath

Pair Specifications									
Pairs	3	4	10	20	25	50	100	200	320
Configuration	1X3	1X4	1X10	1X20	1X25	5X10	10X10	10X20	16X20
Min. Sheath Thickness (mm)	0.65	0.5	0.6	0.7	0.8	1.0	1.5	1.9	2.2
Max. Overall Diameter (mm)	4.8	5.8	8.6	12.0	11.4	17.5	24.0	33.0	39.5
Weight (kg/km)	31	34	102	161	172	352	687	1294	1755